



Lochinvar[®]
HIGH EFFICIENCY BOILERS & WATER HEATERS

**LIGHT DUTY
CHARGER
Submittal Sheet**

CGLD-Sub-04



LIGHT DUTY CHARGER COMMERCIAL GAS WATER HEATERS

JOB NAME _____
LOCATION _____
ENGINEER _____
WHOLESALER _____
MECH. CONTRACTOR _____
MODEL NO. _____
TYPE GAS _____
Btu/hr INPUT _____
RECOVERY RATE IN GPH _____ @ _____ °F RISE
GALLON CAPACITY _____
NOTES

Standard Equipment:

- 80% Thermal Efficiency
- Low NOx operation
- Single Flue Design
- Glass Lined Tank
- 150 PSI Working Pressure
- Tank Saver Anode
- ASME Temperature & Pressure Relief Valve
- Automatic Reset High Limit
- Standing Pilot
- 180°F Operation Approved
- Combustible Floor Approved
- Steel Jacket with Foam Insulation
- Hand Hole Cleanout
- Rated up to 7,700 Feet Altitude
- 3 Year Limited Warranty on Tank
- 1 Year Limited Warranty on Parts

Dimensions and Specifications:

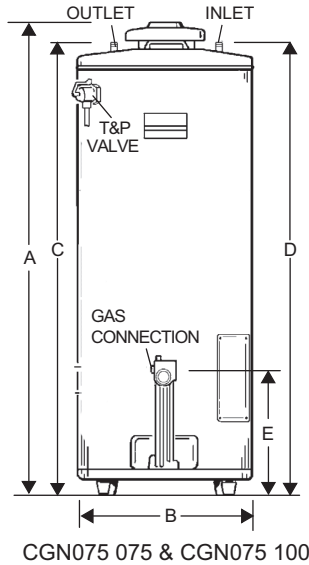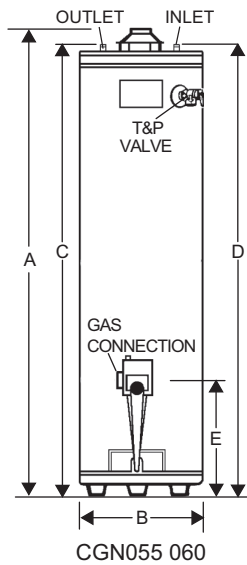

**FOR EASE IN ORDERING
BY MODEL NUMBER**

CG	N	075	075
Charger	Natural Gas	Btu/hr Input	Gallon Capacity

This is a natural gas Charger water heater. It has standard construction, 75,000 Btu/hr, and 75 gallon storage capacity.

Model Number	Btu/hr Input	Capacity Gallons	GPH @ 90°F Rise	A	B	C	D	E	Vent Size	Gas Conn	Water Conn	Shipping Weight
CGN055 060	60,000	55	65	59-3/4"	24"	56-1/4"	56-1/4"	13-1/2"	4"	1/2"	3/4"	185
CGN075 075	75,100	74	81	61"	26-1/2"	58-1/2"	50-1/4"	15-1/4"	4"	1/2"	1"	275
CGN075 100	75,100	98	81	68-1/2"	27-3/4"	66-1/2"	57-1/2"	15-1/4"	4"	1/2"	1-1/4"	350

* In the model number, "N" indicates natural gas; replace "N" with "L" to indicate LP gas models. CGL075 75 and CGL075 100 models are rated at 55,000 Btu/hr



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
Lochinvar.com

