



**ENERGY SAVER
INDIRECT WATER HEATER
Submittal Sheet
EGS-Sub-04**



ENERGY SAVER INDIRECT WATER HEATERS

JOB NAME _____
LOCATION _____
ARCH./ENGR. _____
WHOLESALE _____
MECH. CONTRACTOR _____
MODEL NO. _____
TYPE GAS _____
Btu/hr INPUT _____
RECOVERY RATE IN GPH _____ @ _____ °F RISE
GALLON CAPACITY _____
NOTES

Standard Features

- Non-CFC Foam Insulation
- Glass-Lined Steel Tank
- Large Capacity Single Wall, Glass Lined Heat Exchanger Coil
- (3) Aluminum Tank Saver Anode Rods
- Dielectric Nipples
- Adjustable Aquastat
- Temperature and Pressure Relief Valve
- Brass Drain Valve
- 6 Year Limited Warranty*
(See warranty for details)
- 10 Year Extended Warranty Available
(In residential applications)
* 3 year limited warranty on tank and 1 year limited warranty on Parts when installed in commercial applications.

Energy Saver Indirect Water Heater Dimensions & Specifications

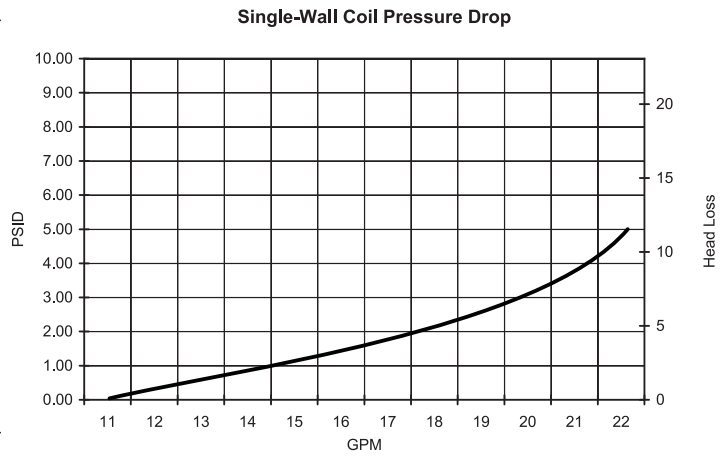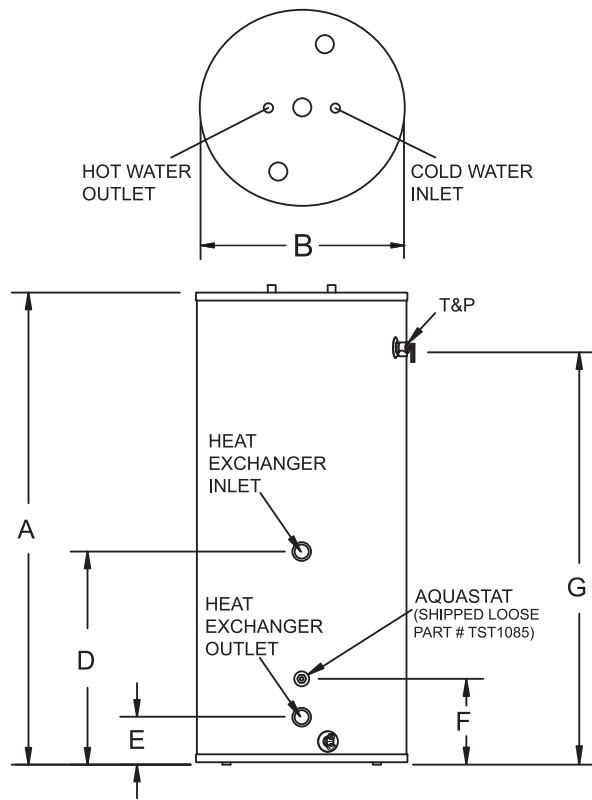

Model	Gal. Cap.	1st Hour Rating @140°F	1st Hour Rating @115°F	A	B	D	E	F	G	Shipping Weight
EGS030	30	204	313	33-3/4"	22"	27-1/2"	5-1/4"	11-1/2"	28-1/4"	164
EGS040T	40	210	320	41-1/4"	22"	27-1/2"	5-1/4"	11-1/2"	34-1/2"	177
EGS050T	50	217	326	46-1/4"	22"	27-1/2"	5-1/4"	11-1/2"	40-1/4"	189
EGS065	60	223	333	59-1/4"	22"	27-1/2"	5-1/4"	11-1/2"	53-1/4"	218
EGS080	75	234	343	59"	24"	27-1/2"	5-1/4"	11-1/2"	53"	243
EGS120	116	261	370	62-1/2"	28-1/4"	28-1/4"	6-1/4"	11-1/2"	55-3/4"	369

Notes: All water connections are 3/4" NPT on 8" centers. Aquastat, relief valve, and drain valve connections are 3/4" NPT. All heat exchanger connections are 1" female NPT. Performance data is based on manufacturer's test results. All ratings are based on 180°F boiler water temperature, 50°F potable water inlet temperature and an approximate boiler output of 220,000 Btu/Hr.

NOTE: The National Standard Plumbing Code, the National Plumbing Code of Canada and the Uniform Plumbing Code limit the pressure of the heat transfer fluid to less than the minimum working pressure of the potable water system up to 30 psi maximum. Also, the heat transfer fluid must be water or other non-toxic fluid having a toxicity of Class 1, as listed in Clinical Toxicology of Commercial Products, 5th Edition.



Lochinvar Corporation • 300 Maddox Simpson Pkwy • Lebanon, TN 37090 • 615-889-8900/Fax: 615-547-1000
www.Lochinvar.com