



Lochinvar[®]
HIGH EFFICIENCY BOILERS & WATER HEATERS

**KNIGHT
HEATING BOILER
Submittal Sheet**

KBN-Sub-10

KNIGHT[®] FLOOR STANDING HEATING BOILERS

JOB NAME _____

LOCATION _____

ENGINEER _____

WHOLESALE _____

MECH. CONTRACTOR _____

MODEL NO. _____

TYPE GAS _____

Btu/hr INPUT _____

Btu/hr OUTPUT _____

NOTES

SMART SYSTEM[™] FEATURES

- › **SMART SYSTEM Digital Operating Control**
 - › Multi-Color Graphic LCD Display with Navigation Dial and Soft Keys
- › **Three Setpoint Temperature Inputs**
- › **Built-in Cascading Sequencer for up to 8 Boilers**
 - › Cascade Multiple Sized Boilers
 - › Lead Lag
 - › Efficiency Optimization
 - › Front End Loading Capability with Copper Fin II
- › **Outdoor Reset Control with Outdoor Air Sensor**
 - › Programmable for Three Reset Temperature Inputs
- › **Programmable System Efficiency Optimizers**
 - › Night Setback w/Override Function
 - › DHW Night Setback w/Override Function
 - › Anti-Cycling
 - › Outdoor Air Reset Curve
 - › Ramp Delay
 - › Boost Temperature & Time
- › **Three Pump Control**
 - › System Pump with Parameter for Continuous Operation
 - › Boiler Pump with Variable Speed Pump Control*
 - › Domestic Hot Water Pump
- › **Domestic Hot Water Prioritization**
 - › DHW tank piped with priority in the boiler loop
 - › DHW tank piped as a zone in the system with the pumps controlled by the Smart System
 - › DHW Modulation Limiting
 - › Separately Adjustable SH/DHW Switching Times*
- › **Building Management System Integration**
 - › 0-10VDC Input to Control Modulation or Set Point
 - › 0-10VDC Modulation Rate Output
 - › 0-10VDC Input Signal from Variable Speed System Pump*
 - › 0-10VDC Input to Enable/Disable call for heat
- › **High-Voltage Terminal Strip**
 - › 120 VAC / 60 Hertz / 1 Phase Power Supply
 - › Three Sets of Pump Contacts
- › **Low Voltage Terminal Strip**
 - › 24 VAC Device Relay
 - › Proving Switch Contacts
 - › Flow Switch Contacts
 - › Alarm on Any Failure Contacts
 - › Runtime Contacts
 - › DHW Thermostat Contacts

- › 3 Space Heat Thermostat Contacts
- › System Sensor Contacts
- › DHW Tank Sensor Contacts
- › Outdoor Air Sensor Contacts
- › Cascade Contacts
- › 0-10VDC BMS External Control Contact
- › 0-10VDC Boiler Rate Output Contacts
- › 0-10VDC Variable Speed System Pump Signal Input
- › 0-10VDC Signal to Control Variable Speed Boiler Pump
- › Modbus Contacts

- › **Time Clock**
- › **Data Logging**
 - › Hours Running, Space Heating
 - › Hours Running, Domestic Hot Water
 - › Ignition Attempts
 - › Last 10 Lockouts
- › **Access to BMS Settings through Graphic LCD Display**
- › **Maintenance Reminder**
 - › Custom Maintenance Reminder with Contractor Info
 - › Installer Ability to De-activate Service Reminder
- › **Low-Water Flow Safety Control & Indication**
- › **Dual Level Password Security**
- › **Customizable Freeze Protection Parameters**

STANDARD FEATURES

- › **ENERGY STAR Most Efficient Recognition**
- › **95% DOE AFUE Efficiency**
- › **Modulating Burner with 5:1 Turndown**
 - › Direct-Spark Ignition
 - › Low-NOx Operation
 - › Field Convertible from Natural to LP Gas
- › **ASME Stainless Steel Heat Exchanger**
 - › 30 psi ASME Relief Valve
- › **Vertical & Horizontal Direct-Vent**
 - › PVC, CPVC, Polypropylene or SS Venting up to 100 feet
- › **Smart System Control**
- › **Condensate Trap**
- › **Other Features**
 - › Automatic Reset High Limit
 - › Adjustable High Limit w/Manual Reset
 - › Boiler Circulating Pump
 - › Adjustable Leveling Legs
 - › Zero Clearances to Combustible Materials
 - › 12-Year Limited Warranty (See Warranty for Details)
 - › 5-Year Parts Warranty

OPTIONAL EQUIPMENT


- › CON-X-US Remote Connectivity
- › Modbus Communication
- › Condensate Neutralization Kit
- › Multi Temperature Loop Control
- › Flow Switch
- › Low-Water Cutoff w/Manual Reset & Test Alarm Bell
- › Concentric Vent Kit
- › SMART SYSTEM PC Software
- › Stack Frame
- › BMS Gateway to LON or BACnet IP
- › BACnet MSTP Communication
- › Sidewall Vent Kit

FIRING CODES


- › M9 Standard Construction
- › M7 California Code

KNIGHT Heating Boiler Dimensions & Specifications

Models:
KBN 081-211

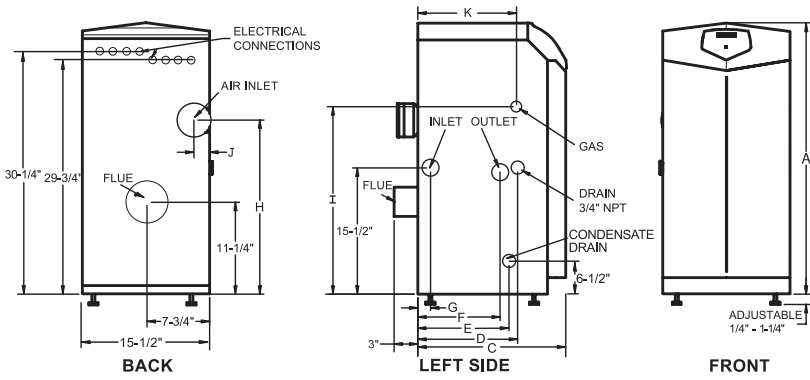

Model:
KBN286

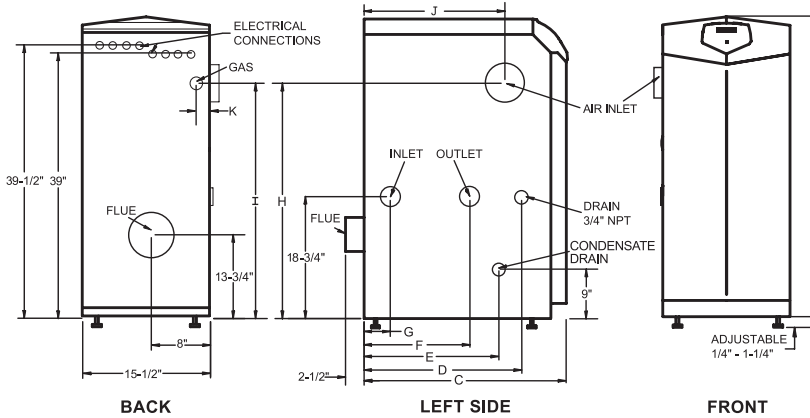

KNIGHT HEATING BOILER						DIMENSIONS AND SPECIFICATIONS														
Model Number	Input Min. MBH	Input Max. MBH	AFUE %	Heating Capacity MBH	NET AHRI Rating MBH	A	C	D	E	F	G	H	I	J	K	Gas Conn.	Water Conn.	Air Inlet	Vent Size	Shipping Wt. (lbs.)
KBN081	16	80	95.0	74	64	33-1/4"	14"	7"	5-3/4"	5"	3"	20-1/2"	22"	1-3/4"	6-1/2"	1/2"	1"	3"	3"	125
KBN106	21	105	95.0	97	84	33-1/4"	14"	6-1/2"	5-3/4"	4-1/2"	1-1/2"	20-1/2"	22"	1-3/4"	6-1/2"	1/2"	1"	3"	3"	129
KBN151	30	150	95.0	139	121	33-1/4"	18"	12-1/4"	11-1/2"	10"	1-1/2"	21-1/4"	23"	1-3/4"	12"	1/2"	1"	3"	3"	157
KBN211	42	210	95.0	196	170	33-1/4"	22-1/4"	16-1/2"	15-3/4"	14-1/4"	5-1/4"	21-1/4"	23"	1-3/4"	16-1/4"	1/2"	1"	3"	3"	172
KBN286	57	285	95.0	267	232	42-1/4"	19-3/4"	12-3/4"	13-1/2"	6"	2"	34"	31"	11-3/4"	4-1/4"	3/4"	1-1/4"	4"	4"	224

Notes: Indoor installation only. All information subject to change. Change "N" to "L" for LP gas models.
Net ratings based on piping and pick-up allowance of 1.15



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
Lochinvar.com

