



Lochinvar[®]
High Efficiency Water Heaters, Boilers and Pool Heaters

SUPER CHARGER
Submittal Sheet

SCGR-Sub-04

SUPER CHARGER COMMERCIAL GAS WATER HEATERS

JOB NAME _____
LOCATION _____
ARCH./ENGR. _____
WHOLESALE _____
MECH. CONTRACTOR _____
MODEL NO. _____
TYPE GAS _____
Btu/hr INPUT _____
RECOVERY RATE IN GPH _____ @ _____ °F RISE
GALLON CAPACITY _____
NOTES


Standard Equipment:

- Glass-lined tank.
- Multiple magnesium tank saver anodes.
- Polyurethane foam insulation.
- Heavy steel jacket with baked enamel finish.
- Adjustable thermostat.
- Automatic Reset High-Limit.
- Standard or ASME tank construction.
- 300 psi test pressure for 150 psi working pressure.
- Approved for 180°F operation.
- 80% Thermal Efficiency
- Efficient multi-flue design.
- Hand hole cleanout.
- Simple 115 VAC circuitry.
- 4 second main gas shutdown.
- 3 year limited warranty.
(See warranty for details)

Optional Equipment:

Place an X in the box by all options that apply
 Temperature and Pressure Gauge
 NSF Construction.

Super Charger Commercial Gas Water Heater Dimensions & Specifications

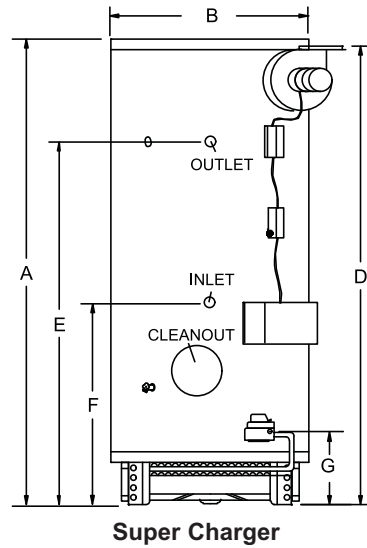

Model Number	Tank Const.	Btu/hr Input	Gallon Cap.	GPH @ 100°F Rise	A	B	D	E	F	G	Vent Size	Gas Conn	Water Conn	Nipple Spread	Shipping Weight
CNR625-065-DF9	STD	625,000	65	606	69-1/2"	28-1/4"	69"	54-1/4"	29"	10-1/2"	8"	1", 3/4" LP	1-1/2" F	-	720
CNR725-080-DF9	STD	725,000	80	703	79-3/4"	28-1/4"	79-1/4"	64-1/4"	29"	10-1/2"	8"	1", 3/4" LP	1-1/2" F	-	800
CNA626-065-DF9	ASME	625,000	65	606	69-1/2"	28-1/4"	69"	54-1/4"	29"	10-1/2"	8"	1", 3/4" LP	1-1/2" F	-	775
CNA726-080-DF9	ASME	725,000	80	703	79-3/4"	28-1/4"	79-1/4"	64-1/4"	29"	10-1/2"	8"	1", 3/4" LP	1-1/2" F	-	880

Notes: Change "N" to "L" for LP gas models. Performance data is based on manufacturer test results.

- T = Top Connections
- F = Front Connections
- B = Back Connections



Lochinvar[®]
High Efficiency Water Heaters, Boilers and Pool Heaters



Lochinvar Corporation • 300 Maddox Simpson Pkwy • Lebanon, TN 37090 • 615-889-8900 / Fax: 615-547-1000

www.Lochinvar.com