



Lochinvar[®]
HIGH EFFICIENCY BOILERS & WATER HEATERS

LOCK-TEMP[®]
SQUARE JACKETED TANK

Submittal Sheet

TSJ-Sub-08b

LOCK-TEMP SQUARE JACKETED STORAGE TANKS

JOB NAME _____

LOCATION _____

ARCH./ENGR. _____

WHOLESALE _____

MECH. CONTRACTOR _____

MODEL NO. _____

GALLON CAPACITY _____

TANK CONSTRUCTION _____

WORKING PRESSURE _____

DIMENSIONS _____

LINING _____

NOTES

Standard Features

- Five-Year Limited Warranty
(See warranty for details)
- Lock-Temp Baffle
- Magnesium Anode
- ASME Certified, "HLW" Stamped
- Safety Drain Pan System
- 125 psi Working Pressure

Optional Tank Linings

- Glass Lined
- Cement Lined

Optional Equipment

Place an X in the box by all options that apply


- 150 psi Working Pressure
- Temperature and Pressure Gauge
- Handhole (4"x6")
- Lifting Lugs
- Manway (Optional on 34" and 40" diameter only)

Lock-Temp Square Jacketed Storage Tanks Dimensions & Specifications

Vertical Square Jacketed ASME Tanks

Model Number	Gal. Cap.	A	B	D	E	Shipping Weight	
						125 psi	150 psi
TV*1250J	1250	132-1/2"	64-1/2"	29-1/4"	21-1/4"	4,660	5,000
TV*1500J	1500	128-1/2"	70-1/2"	31-3/4"	25-3/4"	6,200	6,637
TV*2000J	2000	139"	76-1/2"	33-1/2"	25-1/2"	7,400	7,910
TV*2500J	2500	146-1/2"	82-1/2"	35-1/4"	28"	9,000	9,632

* Indicates tank lining.
G=Glass Lined C=Cement lined

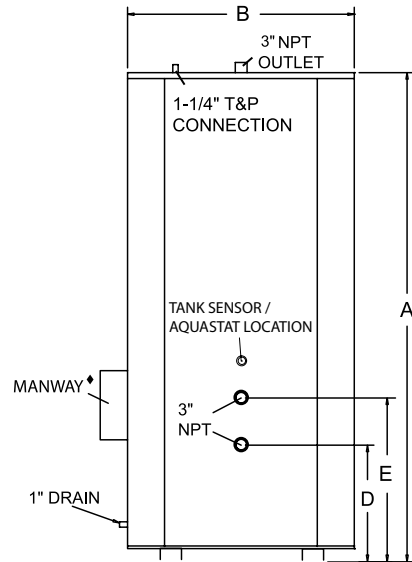

Horizontal Square Jacketed ASME Tanks

Model Number	Gallon Capacity	A	B	Depth	Shipping Weight	
					125 psi	150 psi
TH*1250J	1250	68-1/2"	130-1/4"	60-1/4"	5,126	5,466
TH*1500J	1500	74 1/2"	126-1/4"	66-1/4"	6,820	7,257
TH*2000J	2000	80-1/2"	137"	72-1/4"	8,140	8,650
TH*2500J	2500	86-1/2"	144-1/4"	78-1/4"	9,900	10,532

*Indicates Tank Linings

G=Glass lined
C=Cement lined

